


COSMO | External projector

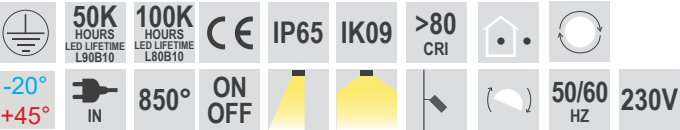

APPLICATIONS


- Indoor and outdoor lighting fixture for production areas and industrial environments.
- Certified for use from -20°C to +45°C.
- For specific applications, please contact our technical department.

MECHANICS


- Die-cast aluminum body with heat sink function.
- Adjustable press-formed steel bracket, complete with graduated goniometer for tilt control.
- Powder-coated for high resistance to atmospheric agents and UV rays.
- High-performance PMMA optics ensure a clear, high-quality view.
- IP65 molded silicone optical unit.
- Asymmetric and diffused light emission.
- Transparent tempered glass resistant to thermal shock.
- All fastenings are made with stainless steel screws with a high molybdenum content of 2.5-3%.
- Annealed silicone gaskets.
- Complete with plastic cable gland and 0.5-1m long output cable.
- IK09 impact protection.
- IP65 protection - dustproof and protected from water jets.
- Insulation class I.

ALIMENTATIONS

- Electronic power supply integrated into the IP65 body.
- Available in the Standard (ON-OFF) version.
- Power supply: 220-240 VAC 50/60 Hz.
- 3-pole terminal block.



LED source replaceable only by a qualified technician.



Power supply replaceable only by a qualified technician.

COSMO External projector								
Light source	Watt LED*	Lumen LED	Lumen OUT**	Energy rating***	Emission	Power supply	K	Colour
COB LED	20W	3280	2235		ASYMMETRIC DIFFUSING	ON-OFF	3000K 4000K	 Black
COB LED	28W	4524	3120					
COB LED	33W	5130	3610					
COB LED	42W	6270	4475					
COB LED	56W	8480	5710					
COB LED	92W	13960	9498					
Standby Power: 0 Mains Standby Power: 0 Power Supply: 230 Vac 50Hz *LED Power **Total Luminaire Output @Tamb 25° - 4000K ***This product contains a light source with Energy Efficiency Class C, D. Consider an 8% reduction in output flux for 3000K LED sources								

