



A wide-angle photograph of a modern office space. The room features a grid ceiling with recessed rectangular lights. Workstations are arranged in rows, separated by glass partitions with black frames. Each desk is equipped with a blue privacy screen and a white ergonomic office chair. The desks are light-colored, and the floor is a neutral-toned tile. The overall atmosphere is clean, bright, and professional.

GUNDI

GUNDI | incasso, plafone




LED luminaire for recessed installation, by means of a support, or ceiling. Suitable for illuminating workplaces, control departments and commercial activities. Thanks to the special anti-glare microprismatic diffuser in transparent methacrylate, the device is suitable for installation in workplaces with the presence of operators for long periods and where VDUs are used. Main body at low surface temperature D (EN 60598 2 24) in press-formed steel sheet, powder-coated, suitable for installation in modular ceilings with 600x600mm panels.

Source
LED module specially designed to ensure maximum uniformity.

Optics
Roto-symmetrical emission (see table opposite) protected by an anti-glare microprismatic screen in transparent methacrylate designed to reduce glare. The device is suitable for installation in UGR <19 (EN12464-1) work environments.


Power supply
Electronic power supply integrated in the body of the fixture, available in the standard (on-off), dimmable (DALI) and emergency (EM) versions. Power supply 220-240Vac 50 / 60Hz.

Note
Appliance compliant with EN 60598 2 22 for power supply from a rescuer system.

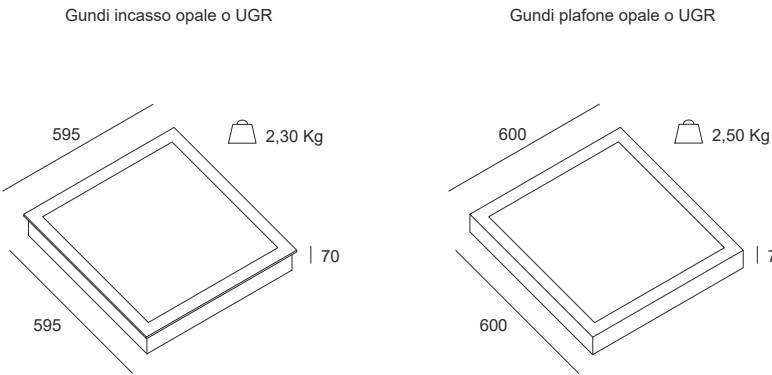


GUNDI incasso, plafone							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	24W	3500	E A t G	3.000° K 4.000° K 5.000° K	ON-OFF On demand DALI	Wide flood (119°)	white
LED	32W	4600	E A t G				
LED	40W	5700	E A t G				
LED	47W	6800	E A t G				

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

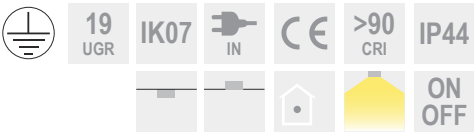

On demand:





GUNDI arretrata | incasso




LED luminaire for recessed installation, by means of a support. Suitable for illuminating workplaces, control departments and commercial activities. Thanks to the special anti-glare diffuser in opal methacrylate, the device is suitable for installation in workplaces with the presence of operators for long periods and where VDUs are used. Main body at low surface temperature D (EN 60598 2 24) in press-formed steel sheet, powder-coated, suitable for installation in modular ceilings with 600x600mm panels.

Source
LED module specially designed to ensure maximum uniformity.

Optics
Roto-symmetrical emission (see table opposite) protected by an opal methacrylate anti-glare screen designed to reduce glare. The device is suitable for installation in UGR <19 (EN12464-1) work environments.


Power supply
Electronic power supply supplied connected to the fixture, available in the standard (on-off) and dimmable (DALI) version. Power supply 220-240Vac 50 / 60Hz.

Note
Appliance compliant with EN 60598 2 22 for power supply from a rescuer system.

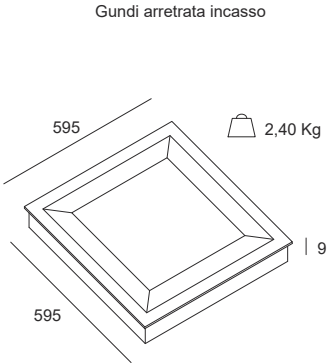


GUNDI arretrata incasso							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	39W	5160	E A G	3.000° K 4.000° K 5.000° K	ON-OFF On demand DALI	Wide flood (119°)	white

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

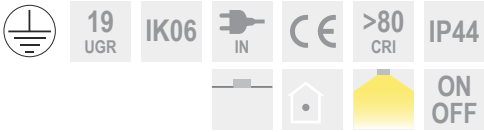

On demand:



GUNDI line | incasso



LED luminaire for recessed installation, by means of a support. Suitable for illuminating workplaces, control departments and commercial activities. Thanks to the special anti-glare microprismatic diffuser in transparent methacrylate, the device is suitable for installation in workplaces with the presence of operators for long periods and where VDUs are used. Main body at low surface temperature D (EN 60598 2 24) in press-formed steel sheet, powder-coated, suitable for installation in modular ceilings with 600x600mm panels.


Source
LED module specially designed to ensure maximum uniformity.

Optics
Roto-symmetrical emission (see table opposite) protected by an anti-glare microprismatic screen in transparent methacrylate designed to reduce glare. The device is suitable for installation in UGR <19 (EN12464-1) work environments.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard (on-off), dimmable (DALI) and emergency (EM) versions. Power supply 220-240Vac 50 / 60Hz.


Note
Appliance compliant with EN 60598 2 22 for power supply from a rescuer system.

Gundi line incasso UGR




GUNDI line incasso							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	25,5W	3430	E A G	3.000° K 4.000° K	ON-OFF On demand PUSH DIM	Wide flood (119°)	white

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90

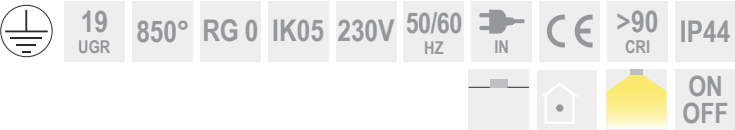


On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician


Request the replacement manual from our technical offices




Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician



GUNDI line double | incasso

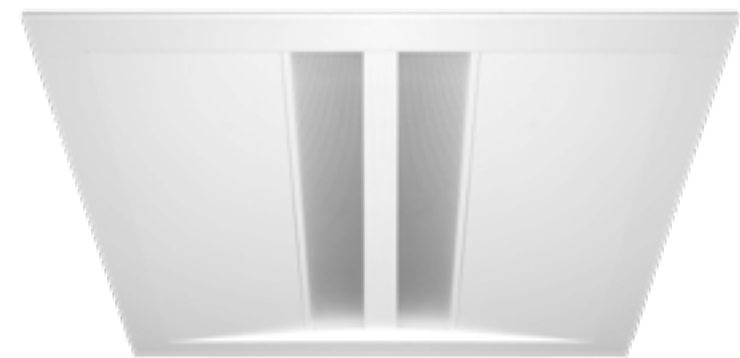

Gundi line double incasso UGR



LED luminaire for recessed installation, by means of support. Suitable for illuminating workplaces, control departments and commercial activities. Thanks to the special double anti-glare microprismatic transparent methacrylate diffuser, the luminaire is suitable for installation in workplaces where operators are present for long periods and where video terminals are used. Main body with low surface temperature D (EN 60598 2 24) in bent sheet steel, powder coated, suitable for installation in modular ceilings with 600x600mm panels.

Source
LED modules specially designed to ensure maximum uniformity.


Optics
Rotosymmetrical emission (see table alongside) protected by a double anti-glare microprismatic screen in transparent methacrylate designed to reduce glare. The luminaire is suitable for installation in workplaces UGR<19 (EN12464-1).

Power supply
Electronic ballast integrated in the body of the fixture, available in the dimmable (DALI), dimmable (Push Dim) and emergency (EM) versions. Power supply 220-240Vac 50/60Hz.

Note
Equipment compliant with EN 60598 2 22 for power supply from a backup system.


GUNDI line double incasso							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	38W	5520	E A t G	3.000° K 4.000° K	DALI	Wide flood (119°)	white
LED	42W	5920	E A t G		On demand PUSH DIM		

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

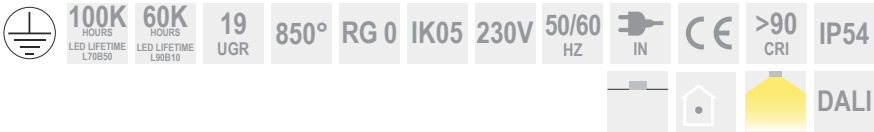

On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)