

TADDEO | proiettore da esterno




LED projector for wall, ceiling and floor installation using dowels, suitable for lighting outdoor areas, gardens, parks and car parks. The optical compartment, the arm and the base are made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, it acts as a radiating surface and guarantees excellent heat dissipation. The projector can be adjusted in the vertical plane $\pm 90^\circ$ by means of a painted steel bracket and provided with mechanical blocks which guarantee stable pointing of the light beam. Tempered extra-clear protective front glass (thickness 5mm) fixed by means of annealed silicone sealing gaskets to prevent the formation of deposits which would considerably reduce the performance of the appliance. Screws in stainless steel with a high molybdenum content. IP65 protection on both the product and the cable using IP65 connectors.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics available in various openings (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

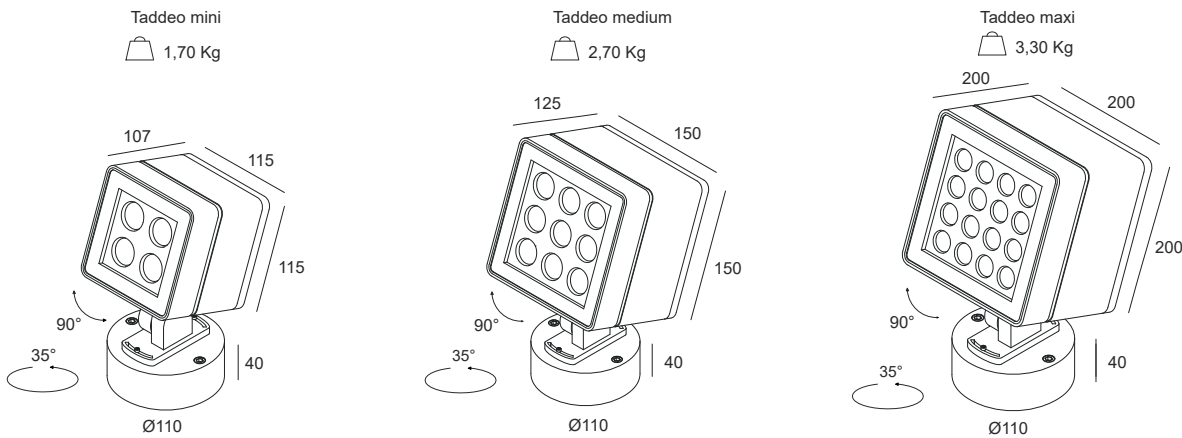


TADDEO proiettore da esterno								
Sorgente Light source	Watt LED*	Lumen OUT**	Dimension mm Dimension mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	12W	1560	115		3.000° K 4.000° K	ON-OFF	Spot (18°) Medium (26°) Flood (45°)	grey anthracite black
LED	30W	3900	150					
LED	52W	7020	200		3.000° K 4.000° K RGBW			

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source D
Consider a reduction in output flow dell'8% by source LED 3000°K


Connectors



On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices

