



MOROVICH

MOROVICH | sospensione




Circular LED luminaire for suspended installation, made of spun aluminum, powder coated and supplied with suspension kit complete with cables L.2000mm. Suitable for lighting halls, conference rooms, multi-purpose environments or prestigious private residences. The industrial design that distinguishes it makes it a particularly suitable object for modern environments. Thanks to the anodically polished aluminum reflector, the fixture guarantees a high luminous flux even when installed at great heights.

Source
LED module specially designed to ensure maximum lighting performance.


Optics
Rotosymmetrical (see table alongside) protected by a screen in tempered and sandblasted glass to reduce glare.

Power supply
Electronic ballast integrated in the body of the fixture, available in the standard (on-off) and dimmable (DALI) (PUSH DIM) versions. Power supply 220-240Vac 50/60Hz.




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

Morovich sospensione

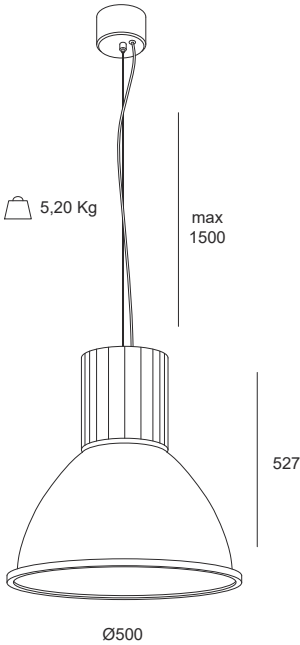

MOROVICH sospensione								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	60W	8590	500	E A T G	3.000° K 4.000° K	ON-OFF	Wide flood (115°)	white
LED	75W	10263		E A T G		On demand DALI		black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source **E**
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90



On demand:

