

JACK

JACK | applique




LED luminaire with direct light emission for wall installation. Body made of powder coated press bent carbon steel. Wall lamp particularly suitable for illuminating private residences, commercial activities or exhibition spaces. The design makes the appliance extremely versatile for various uses.

Source
LED modules specially designed to ensure maximum uniformity and the total absence of point light.


Optics
Direct roto-symmetrical emission (see table alongside) protected by an opal methacrylate anti-glare screen designed to reduce glare.

Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz

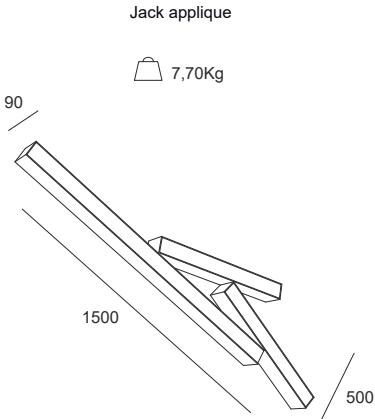


JACK applique							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	60W	6132	G A G	3.000° K 4.000° K	ON-OFF	Wide flood (110°)	white black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **G**



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

