

ZACAPS | plafone




LED luminaire for ceiling installation. Body in aluminum profile, powder coated, with a diameter of 150mm for the 12W version and 220mm for the 20W version. Die-cast aluminum closing frame, powder painted in contrast with the lamp body. Passive dissipation system by means of die-cast aluminium.


Source
Chip On Board (COB) LED technology.

Optic
Rotosymmetrical optics (see table alongside) protected by an opal methacrylate (PMMA) screen designed to reduce glare.

Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

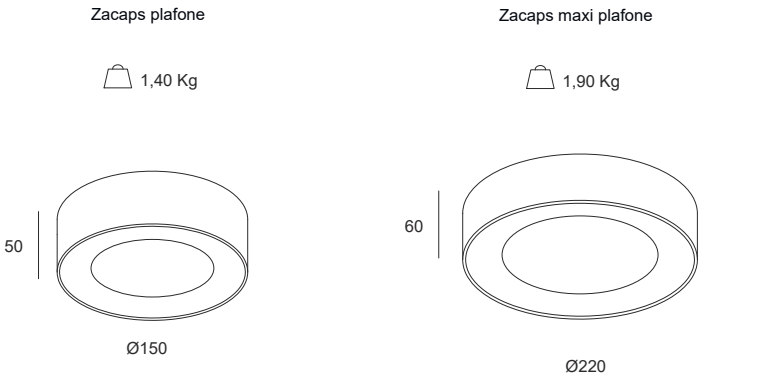


ZACAPS plafone								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	12W	580	150		3.000° K 4.000° K	ON-OFF	Ultra Wide (120°)	white
LED	20W	1050	220					black-white
P. Stand-by: 0 P. Stand-by in rete: 0 Int. Elettrica: 230 Vac 50Hz *LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source F Consider a reduction in output flow dell'8% by source LED 3000°K								



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

