



# PANAMA

# PANAMA BOLLARD | apparecchio da terra




Lighting fixture for pedestrian and vehicular paths with indirect emission, the minimal design and the lightness of the lamp body make it suitable for installation in outdoor environments. Lamp body in extruded aluminum profile without welding points, anodized and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, ground fixing plate made of stainless steel. LED module protected by a screen in tempered extra-clear glass (thickness 3mm) and fixed by means of annealed silicone gaskets, which allow water and dirt to flow away, avoiding the formation of deposits. IP67 protection both on the product and on the cable using IP67 connectors.

**Source**  
Chip On Board (COB) LED technology.

**Optics**  
Rotosymmetrical optics (see table alongside) protected by a screen in tempered extra-clear safety glass.

**Power supply**  
Electronic driver integrated into the body of the luminaire, available in the standard version (on-off) or dimmable on request (DALI). Power supply 220-240Vac 50/60Hz.

**Note**  
We recommend the use of the SPD protection device, supplied by us upon request.

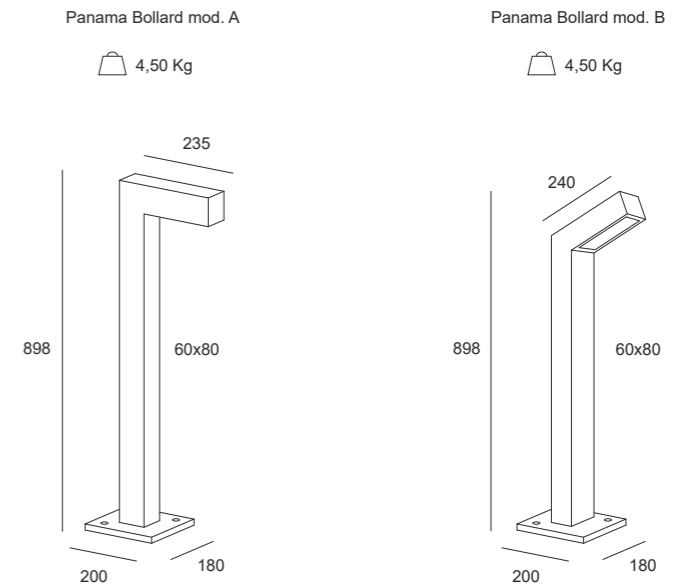


## PANAMA BOLLARD | apparecchio da terra

Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	9W	1300	<b>G</b>	3.000° K 4.000° K	ON-OFF On demand DALI	Wide flood (119°)	white light grey

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz  
\*LED power \*\*Total flow exiting the appliance @ Tamb 25° - 3000°K \*\*\*This product contains an Energy Efficiency Class light source G

### Connectors

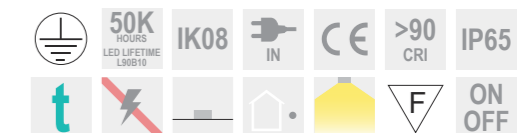


On demand:

SPD DALI



Sorgente LED sostituibile solo da tecnico abilitato  
LED source replaceable only by a qualified technician



Alimentatore non sostituibile  
Non-replaceable power supply

Request the replacement manual from our technical offices





# PANAMA PALO | apparecchio da terra




Lighting fixture for pedestrian and vehicular paths with indirect emission, the minimal design and the lightness of the lamp body make it suitable for installation in outdoor environments. Lamp body in extruded aluminum profile without welding points, anodized and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, ground fixing plate made of stainless steel. LED module protected by a screen in tempered extra-clear glass (thickness 3mm) and fixed by means of annealed silicone gaskets, which allow water and dirt to flow away, avoiding the formation of deposits. IP67 protection both on the product and on the cable using IP67 connectors.

**Source**  
Chip On Board (COB) LED technology.

**Optics**  
Rotosymmetrical optics (see table alongside) protected by a screen in tempered extra-clear safety glass.

**Power supply**  
Electronic driver integrated into the body of the luminaire, available in the standard version (on-off) or dimmable on request (DALI). Power supply 220-240Vac 50/60Hz.

**Note**  
We recommend the use of the SPD protection device, supplied by us upon request.

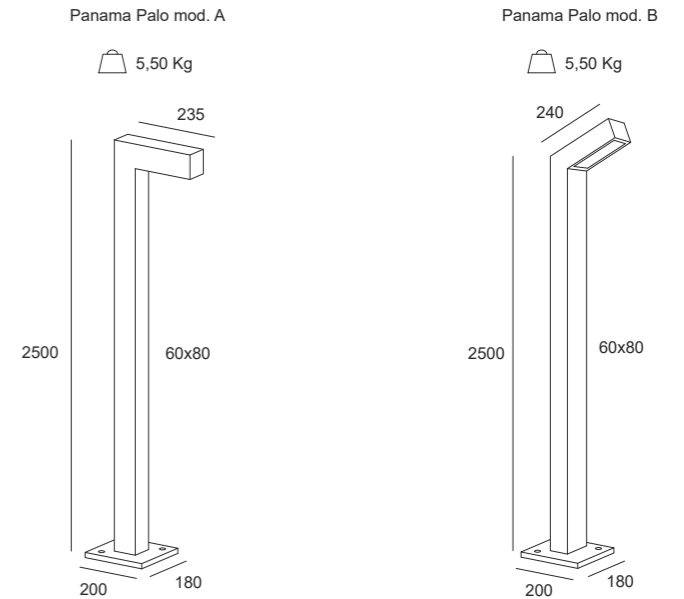

PANAMA PALO   apparecchio da terra							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	9W	1300	<b>G</b>	3.000° K 4.000° K	ON-OFF On demand DALI	Wide flood (119°)	white light grey

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz  
\*LED power \*\*Total flow exiting the appliance @ Tamb 25° - 3000°K \*\*\*This product contains an Energy Efficiency Class light source G

## Connectors



On demand:

Sorgente LED sostituibile solo da tecnico abilitato  
LED source replaceable only by a qualified technician


Request the replacement manual from our technical offices

Alimentatore non sostituibile  
Non-replaceable power supply





# PANAMA STRADALE | stradale

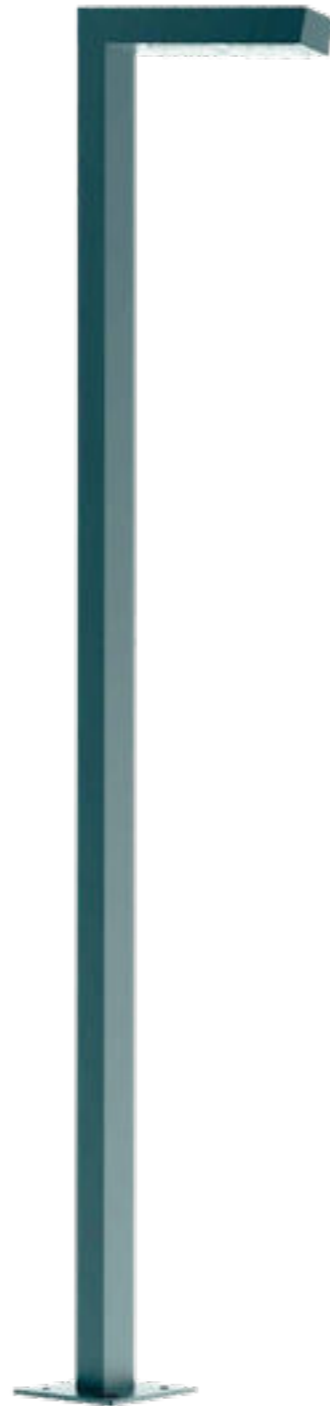

Direct emission street lighting fixture for pedestrian and vehicular paths. Lamp body in extruded aluminum profile without welding points, anodized and subsequently powder painted to provide high resistance to atmospheric agents and UV rays, ground fixing plate made of stainless steel. LED module protected by optics fixed by annealed silicone gaskets, which allow water and dirt to flow away, avoiding the formation of deposits. IP67 protection on both the product and the cable using IP67 connectors.

#### Source

Chip On Board (COB) LED technology.

#### Optics


Different optical apertures available (see table alongside).

#### Power supply


Electronic driver integrated into the body of the luminaire, available in the standard version (on-off) or dimmable on request (DALI). Power supply 220-240Vac 50/60Hz.

#### Note

We recommend the use of the SPD protection device, supplied by us upon request.

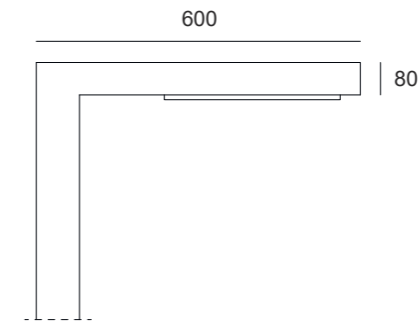

Panama Stradale mod. A

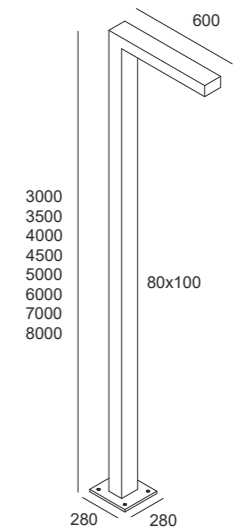

### PANAMA STRADALE | stradale

Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Ottiche Optics	Colore Colour
LED	29W	4500		3.000° K 4.000° K	ON-OFF On demand DALI	AS1 - Asimmetrico 1 ST1 - Stradale 1 ST2 - Stradale 2 CP - Batwing	white light grey

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz

\*LED power \*\*Total flow exiting the appliance @ Tamb 25° - 3000°K \*\*\*This product contains an Energy Efficiency Class light source G


#### Connectors




Socket-plug




3-way "T" type

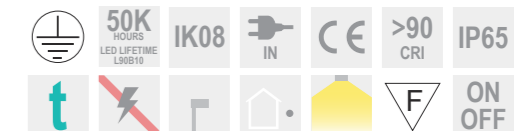

On demand:



Sorgente LED sostituibile solo da tecnico abilitato  
LED source replaceable only by a qualified technician





Alimentatore non sostituibile  
Non-replaceable power supply

Request the replacement manual from our technical offices





PANAMA STRADALE AS1 - Asimmetrica 1

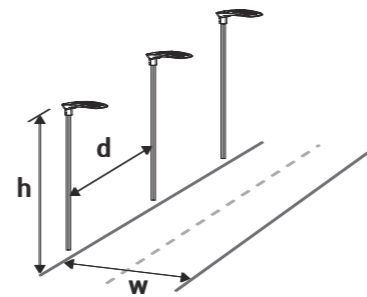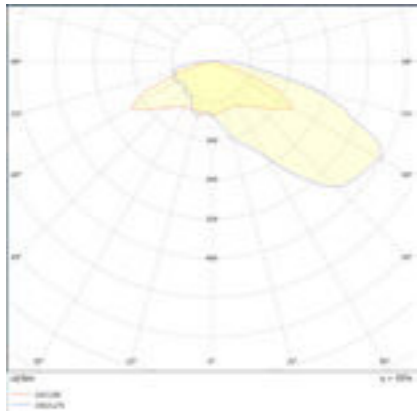



W= 8 m - H= 8m

PANAMA STRADALE ST2 - Stradale 2

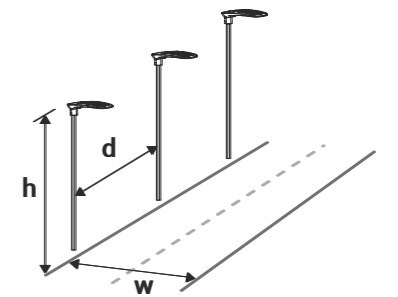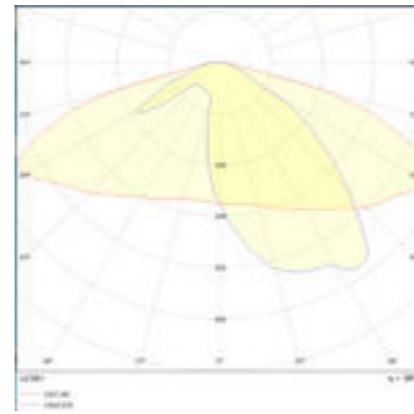



W= 8 m - H= 8m

PANAMA STRADALE ST1 - Stradale 1

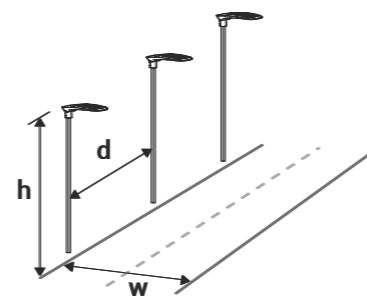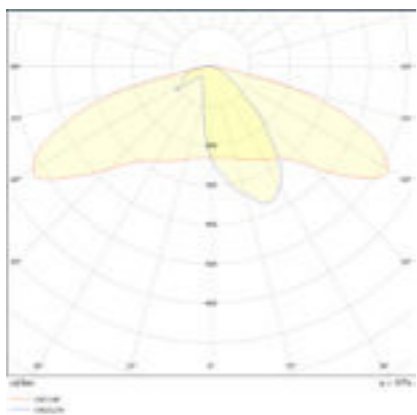

W= 8 m - H= 8m

PANAMA STRADALE CP - Batwing

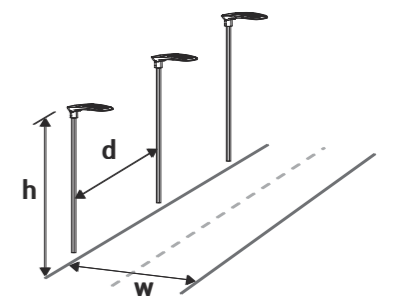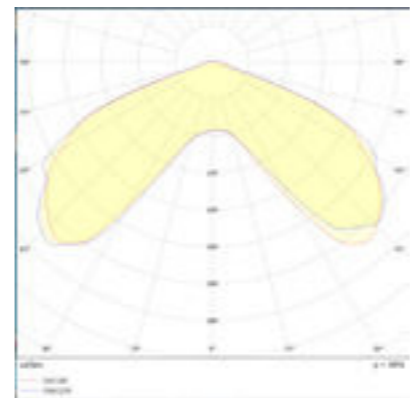

W= 8 m - H= 8m

