
LINEA INCASSATA IP67 | incasso calpestabile



Linea incassata IP67

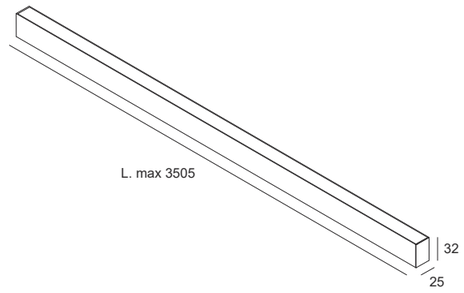

Walkable recessed walkable LED profile in aluminum with the possibility of internal cable storage, which can be installed on the floor using the formwork (supplied as an accessory). Made to measure, length max. 3005mm.

Source
LED module with double-sided copper Kapton® PCB and gold-plated printed circuits, specially designed to guarantee maximum efficiency.

Optics
Diffusing emission protected by crystalline resin

Power supply
Electronic ballasts available in the standard (on-off) and dimmable (DALI) version, for single or multiple installations. Electronic ballast not supplied. 24Vdc power supply.

Note
Outgoing power cable length L=1m in neoprene. IP67 protection on both the product and the cable using IP67 connectors. The product is not suitable for installations in swimming pools and fountains.


LINEA INCASSATA IP67 | incasso calpestabile

W / Mt	Lm / mt	Classe Energetica *Energy rating**	Temperatura Colore	Lunghezza MAX	Tensione Vcc	Emissione *Emission*	Colori
22W	1200 lm	E (A↑G)	3000 K 4000 K	3505 mm	24V	Wide flood (110°)	white silver

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 24 Vdc
*This product contains an Energy Efficiency Class light source **E**

Formwork

Cassaforma Linea incassata IP67

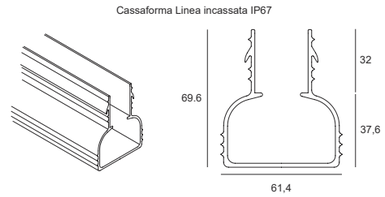

Connectors



Socket-plug




3-way “T” type

III | 24 V DC | OUT | IK10 | >90 CRI | IP67 | F | ON OFF


On demand:

SPD | DALI





Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

Request the replacement manual from our technical offices

For updated technical data or further technical information, consult the website (www.xlitesrl.it)
For correct assembly of the appliance, consult the user manual