

LUPIN | sospensione




Linear LED luminaire for suspended installation, body in powder-coated aluminum profile, supplied with suspension kit complete with L.2000mm cables. Adjustable spotlights machined from solid, anodized and subsequently powder coated, placed on the sides of the aluminum profile to allow specific lighting of the rooms. Suitable for illuminating public and private environments. The very small profile dimensions make this device light and extremely versatile for various uses. Thanks to the special anti-glare diffuser in opal methacrylate, the luminaire is suitable for installation in workplaces with the presence of operators for long periods and where video terminals are used.

Source
LED module specially designed to guarantee maximum uniformity and the total absence of point light.
LED 6W@350mA 18V technology for adjustable spotlights.


Optics
Rotosymmetric emission (see table alongside) protected by an opal methacrylate screen designed to reduce glare.

Power supply
Electronic power supply external to the device, available in standard versions (on-off). Power supply 24Vdc + 350mA 18V

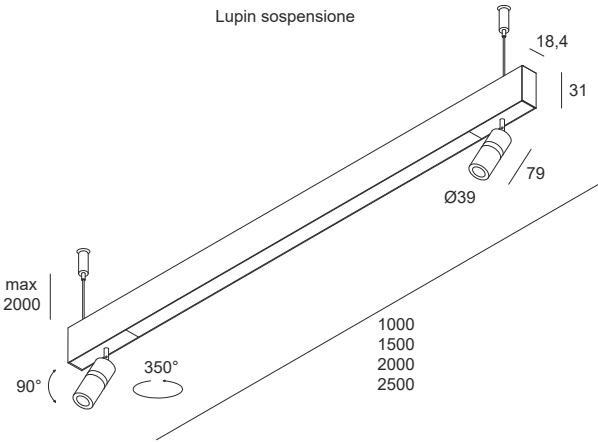


LUPIN sospensione mono-emissione								
Sorgente Light source	Watt/mt LED*	Lumen/mt LED**	Lunghezza mm Length mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	23W+12W	2620+1200	1000	E A T G	3.000° K 4.000° K	ON-OFF	Wide (70°)	bianco nero argento

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 24Vdc + CC 350mA 18V
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician


Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

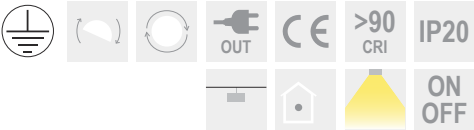

LUPIN | plafone

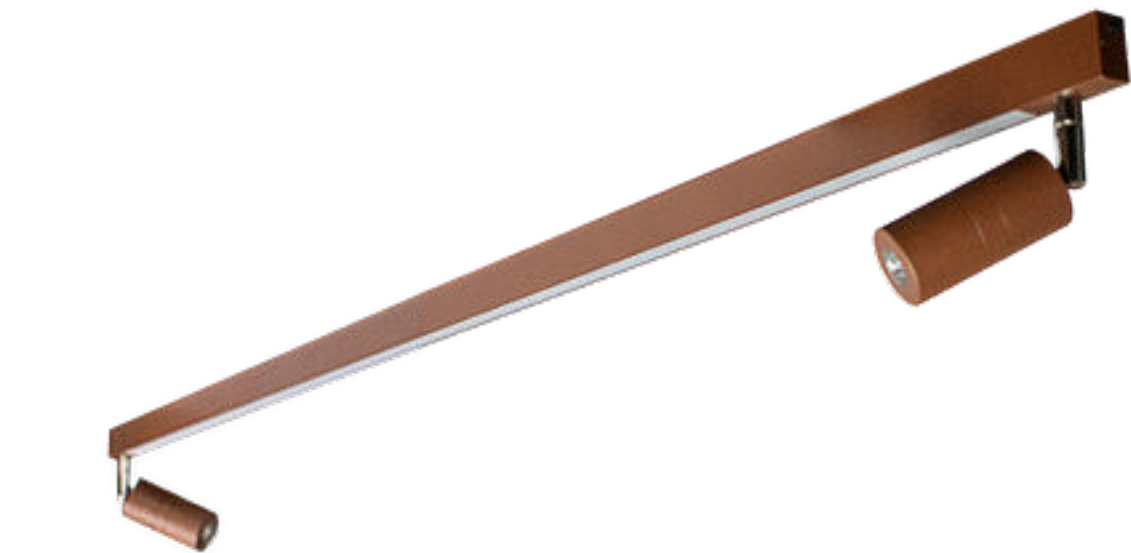


Linear LED luminaire for ceiling installation, body in powder-coated aluminum profile. Adjustable spotlights machined from solid, anodized and subsequently powder coated, placed on the sides of the aluminum profile to allow specific lighting of the rooms. Suitable for illuminating public and private environments. The very small profile dimensions make this device light and extremely versatile for various uses. Thanks to the special anti-glare diffuser in opal methacrylate, the luminaire is suitable for installation in workplaces with the presence of operators for long periods and where video terminals are used.

Source
LED module specially designed to guarantee maximum uniformity and the total absence of point light.
6W@350mA 18V LED technology for adjustable spotlights.


Optics
Rotosymmetric emission (see table alongside) protected by an opal methacrylate screen designed to reduce glare.

Power supply
Electronic power supply external to the device, available in standard versions (on-off). Power supply 24Vdc + 350mA 18V

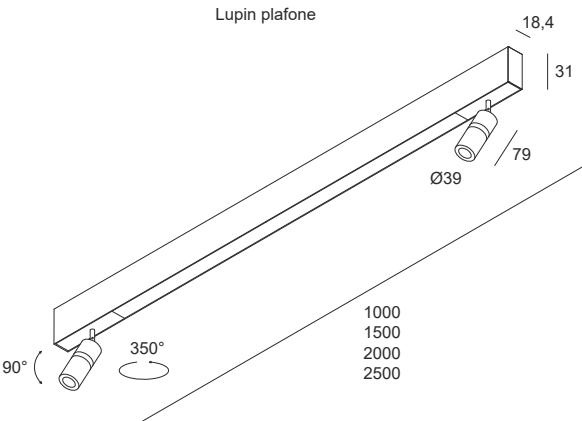


LUPIN plafone								
Sorgente Light source	Watt/mt LED*	Lumen/mt LED**	Lunghezza mm Length mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	23W+12W	2620+1200	1000	E A G	3.000° K 4.000° K	ON-OFF	Wide (70°)	bianco nero argento

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 24Vdc + CC 350mA 18V
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

Request the replacement manual from our technical offices



For updated technical data or further technical information, consult the website (www.xlitesrl.it)
For correct assembly of the appliance, consult the user manual