



OSLO

OSLO | applique




LED fixture for wall installation, with indirect emission. Suitable for enhancing elevations and covering materials. Lamp body made of anodized aluminum alloy and subsequently powder painted to provide high resistance to atmospheric agents and UV rays, acts as a radiating surface and guarantees optimal heat dissipation. Joint to orient the product. Stainless steel screws with a high molybdenum content. Closing gaskets in annealed silicone.

Source
LED module specially designed to guarantee maximum uniformity and the total absence of point light.

Optics
Rotosymmetric optics (see table alongside) treated by high vacuum metallization and protected by a polycarbonate screen fixed by resin.

Power supply
Electronic ballast integrated into the body of the luminaire, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

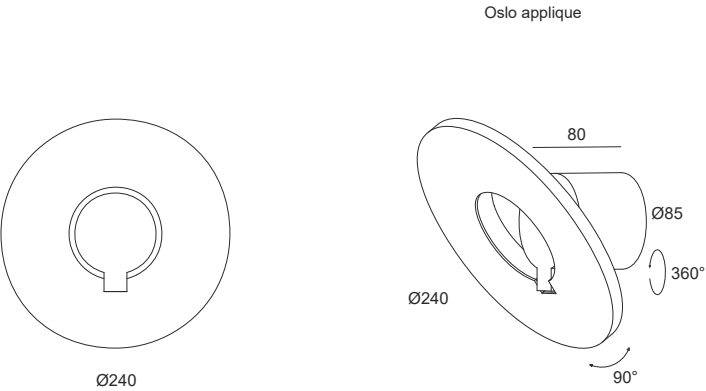


OSLO applique							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	9W	810	G A + G	3.000° K	ON-OFF	Wide flood (85°)	antracite

P. Stand-by: / | P. Stand-by in rete: / | Int. Elettrica: 230Vac
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source G
Consider a reduction in output flow dell'8% by source LED 3000°K

Connectors




Connectors IP




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

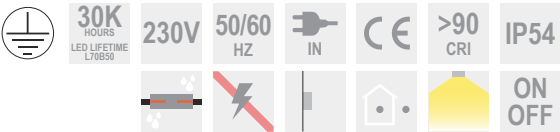

A richiesta:

