



SEATTLE

SEATTLE | apparecchio da terra



Direct emission lighting fixture for pedestrian and vehicular paths. Body made of concrete. Ground fixing plate made of stainless steel. LED module protected by an extra-clear glass screen (thickness 3mm) tempered and fixed by annealed silicone gaskets to avoid deposits that would significantly reduce the performance of the fixture. IP67 protection on both the product and the cable using IP67 connectors.

Source
LED Chip On Board (COB) technology.


Optics
Roto-symmetrical optic (see table on the side) protected by a tempered extra-clear safety glass screen.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

Seattle

5,50 Kg

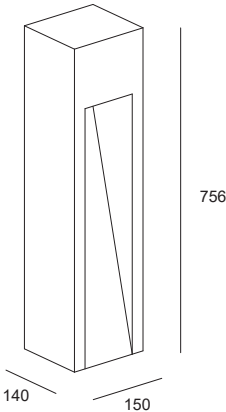

SEATTLE apparecchio da terra							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	11W	670	G A T G	3000° K	ON-OFF	Wide flood (65°)	grey

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K***This product contains an Energy Efficiency Class light source G

Connectors



Socket-plug




3-way "T" type




On demand:

SPD



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices

