



AKI



AKI | applique

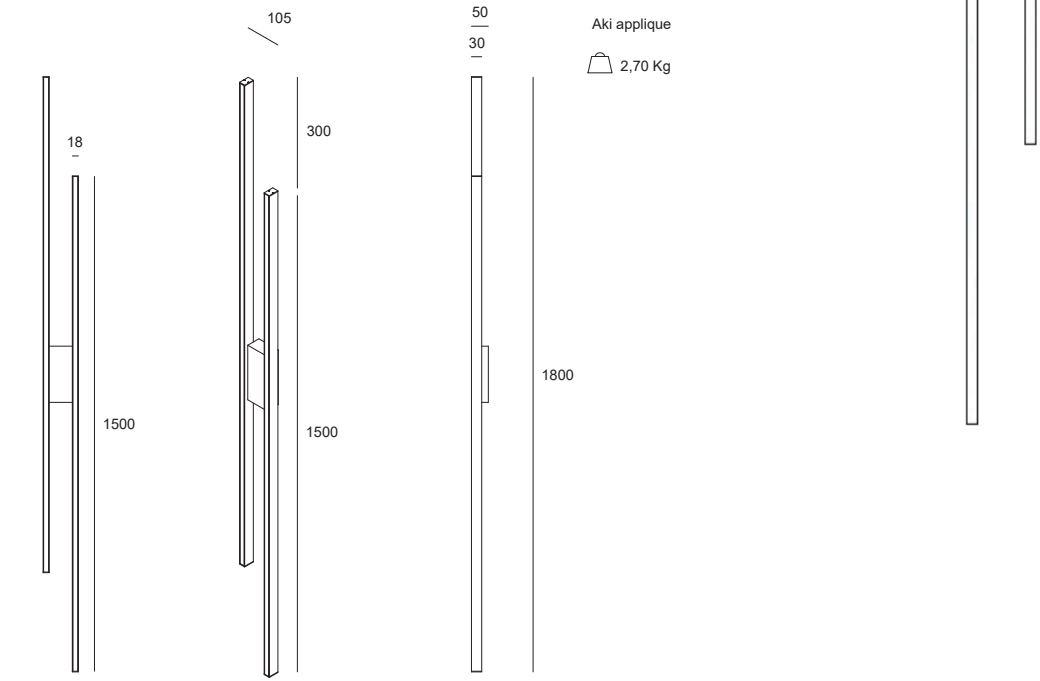

AKI applique				
Watt/mt*	Lumen/mt**	Lenght mm	K	Emission
46W	5240	1000	3000 K 4000 K	Flood (70°)

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 24Vdc
*LED Power **Total Luminaire Output Flux @Tamb 25° - 3000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colours





Charateristics



On request:



AKI | Pendant

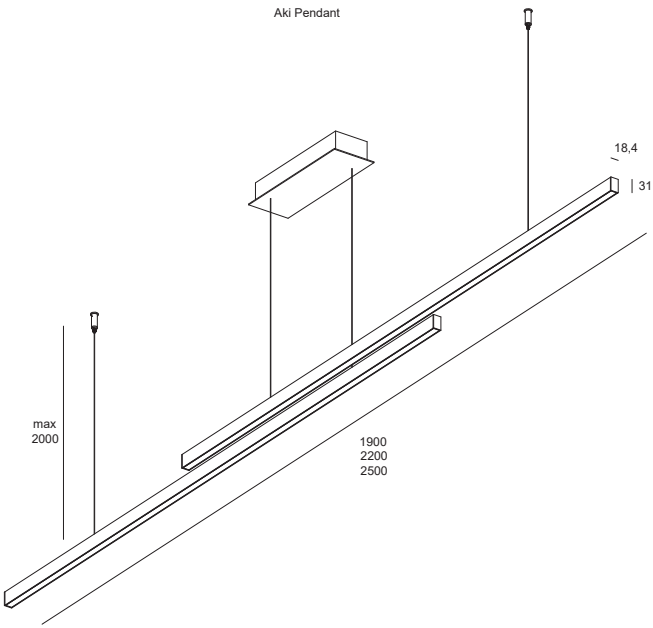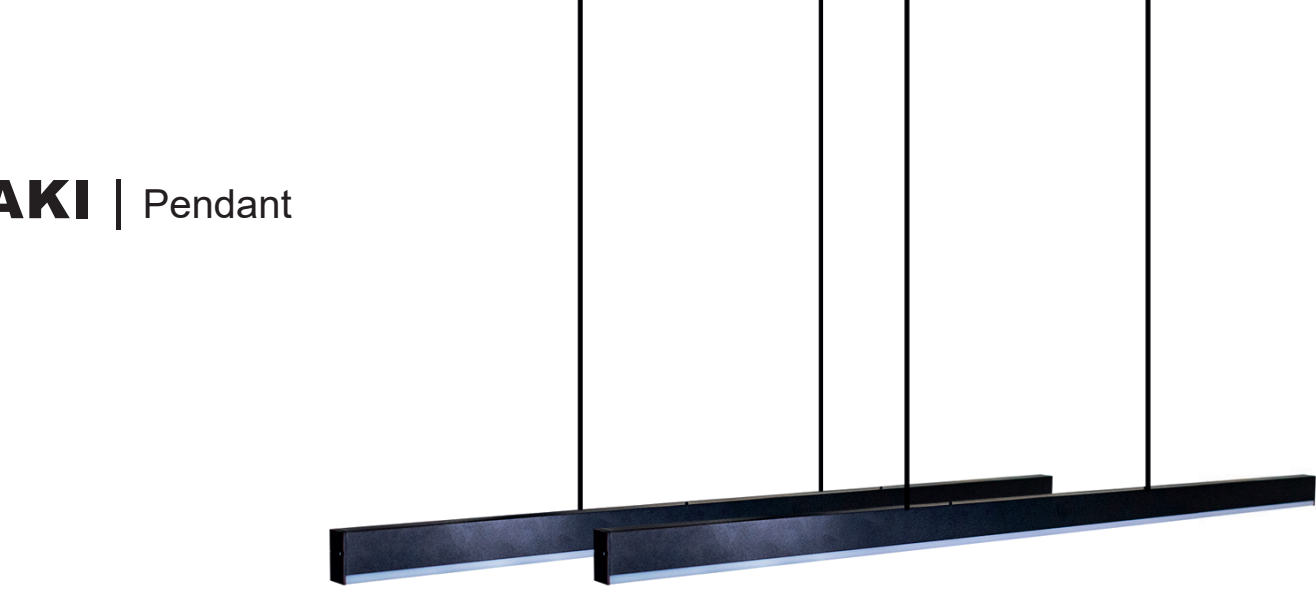

AKI Pendant				
Watt/mt*	Lumen/mt**	Lenght mm	K	Emission
46W	5240	1000	3000 K 4000 K	Flood (70°)

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 24Vdc
*LED Power **Total Luminaire Output Flux @Tamb 25° - 3000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colours



Charateristics



On request:

