




IDRO

IDRO | Acoustic Pendant Light

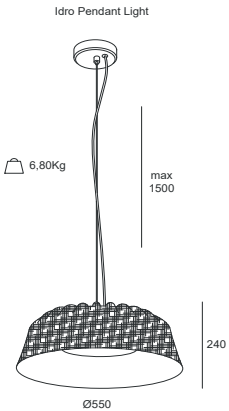

IDRO | Pendant Light

Watt*	Lumen**	øDiameter mm	K	Emission
40W	4600	550	Adjustable	Medium (45°)

Standby power: 0 | Networked standby power: 0 | Power supply: 230 VAC 50 Hz
*LED power **Total fixture output flux @ Tamb 25°C – 4000 K. Allow for an 8% reduction in output flux for 3000 K LED sources.

Colours



Charateristics



For up-to-date technical data or further technical information, please visit the website (www.xlitesrl.it).
For correct installation and/or replacement of the unit, please consult the user manual or contact the technical department.

