

TRIPLE | Waterproof ceiling light

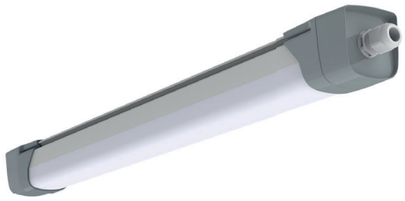



50K HOURS LED LIFETIME L90B10 | 100K HOURS LED LIFETIME L80B10 | CE | IP66 | IK10 | >80 CRI | RG 0

-30° +50° | IN | 850° | ON OFF | 230V | 50/60 HZ | HACCP

On request:

DALI

APPLICATIONS

- Lighting fixture for indoor use, including production areas, industrial environments, and commercial spaces.
- Fixtures suitable for use in the food industry (HACCP compliant).
- Certified for operation in temperatures ranging from -30°C to +50°C.
- For specific applications, please consult our technical department.

MECHANICS

- Polycarbonate body, ensuring high resistance to impacts and temperature variations.
- Specially designed LED module for maximum performance and efficiency.
- Electronics purpose-developed for use in industrial environments.
- High-impact-resistant polycarbonate diffuser/cover.
- Diffused light emission.
- Standard 1200mm and 1500mm versions with adjustable lumen output; a "High Output" version is also available in the 1500mm size.
- Molded polycarbonate end caps with a watertight gasket and a quick-connect plug.
- Includes a plastic cable gland (M20–M25) and a 0.5–1m output cable.
- IK10 impact protection rating.
- Includes a watertight connector for mains connection.
- IP66 protection rating – dust-tight and protected against powerful water jets.
- Insulation Class I.

POWER SUPPLY

- Electronic power supply integrated into the luminaire body.
- Available in a standard (ON-OFF) version; DALI version available upon request.
- Power supply: 220–240 VAC, 50/60 Hz.
- 3/5-pole terminal block.

LED light source replaceable only by a qualified technician.

Power supply unit to be replaced only by a qualified technician.

Request the replacement manual from our technical departments


www.xlitesrl.it

TRIPLE | Waterproof ceiling light

Sorgente *Light source*	Watt LED*	Lumen LED	Lumen OUT**	Classe Energetica *Energy rating****	L Lunghezza L *Lenght*	Alimentazione *Power supply*	K	Colore *Colour*
LED	13W - 28W - 44W	1989 - 4284 - 6732	1491 - 3213 - 5049	D (A↑G)	1200mm	ON-OFF DALI	4000K	Grigio
LED	25W - 40W - 54W	3700 - 5920 - 7992	2775 - 4440 - 5994	D (A↑G)	1500mm			
LED HO	58W	9570	7177	D (A↑G)				

Standby power: 0 | Networked standby power: 0 | Electrical input: 230 Vac 50Hz
*LED power **Total luminous flux output from the luminaire @Tamb 25°C - 4000K ***This product contains a light source with an Energy Efficiency Class of D. Please note an 8% reduction in luminous flux output for a 3000K LED source, and a 10% reduction for an LED source with CRI>90.

Accessory Type	Description
	*316L stainless steel fixing clips, 2 units*

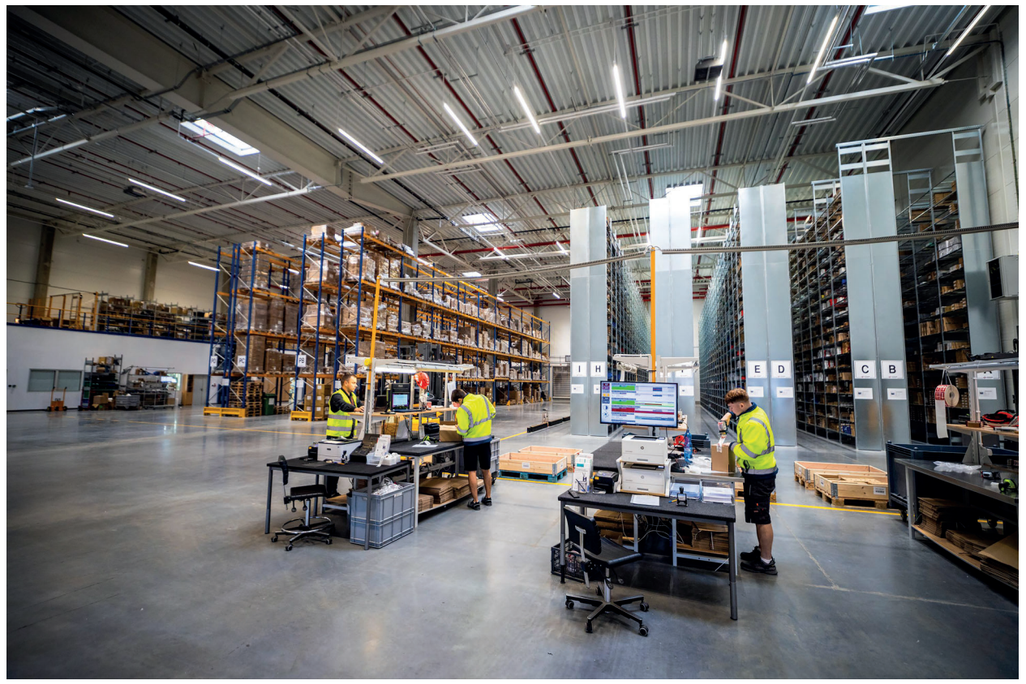

For information regarding the minimum/maximum number of lighting fixtures that can be installed on a single switch—where not explicitly stated in our installation manuals—please contact our technical department. For proper installation of the unit, please refer to the user manual.
For updated technical data or further technical information, please visit our website (www.xlitesrl.it).