



BACIAMANO | Handrail



Baciamano

2,00Kg
2,80Kg
4,00Kg



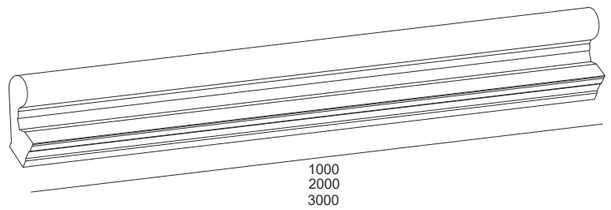

BACIAMANO | Handrail

Watt/mt*	Lumen/mt**	L Lenghts	K	Emission
9,6+9,6W	996+996	1000 mm 2000 mm 3000 mm	2700 K	Doppia emissione
	1076+1076		3000 K	
	1163+1163		4000 K	
12+12W	1260+1260	1000 mm 2000 mm 3000 mm	2700 K	
	1360+1360		3000 K	
	1479+1479		4000 K	

P. Stand-by: 0 | P. Networked stand-by: 0 | Electrical input: 230 Vac 50Hz, internal power supply unit. *LED power. **Total luminous flux emitted by the luminaire @Tamb 25°C - 4000°K. Note: a reduction of 8% in the emitted luminous flux should be considered for a 3000°K LED source.

Colours

Charateristics

IP20 · >90 CRI · OUT · 24 V DC

On request: DIM · EM EN 60598-2-22

For updated technical data or further technical information, please visit the website (www.xlitesrl.it).
For proper installation and/or replacement of the device, please refer to the user manual or contact the technical department.



