



LISBONA

LISBONA | apparecchio da terra



Lighting device for pedestrian and vehicular paths with indirect emission, the minimal design and the lightness of the lamp body make it suitable for outdoor installations. Lamp body in extruded aluminum profile without welding points, anodized and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, ground fixing plate made of stainless steel. LED module protected by a tempered extra-clear glass screen (3mm thick) fixed by annealed silicone gaskets and coplanar to the fixture body to avoid the formation of deposits that would significantly reduce the performance of the fixture. IP67 protection both on the product and on the cable using IP67 connectors.

Source
LED Chip On Board (COB) technology.


Optics
Roto-symmetrical optic (see table on the side) protected by a tempered extra-clear safety glass screen.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

Lisbona 700mm

3,40 Kg

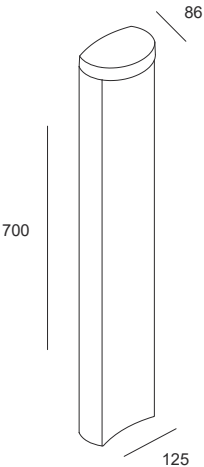


LISBONA apparecchio da terra							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	Κ	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	10W	1125	E A ↑ G	3.000° K	ON-OFF	Wide flood (119°)	white grey corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E

Connectors




Socket-plug 3-way "T" type

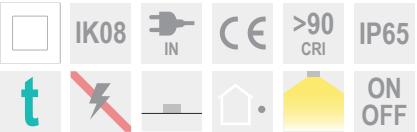


On demand:

SPD



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices

